


Torica-sPBV

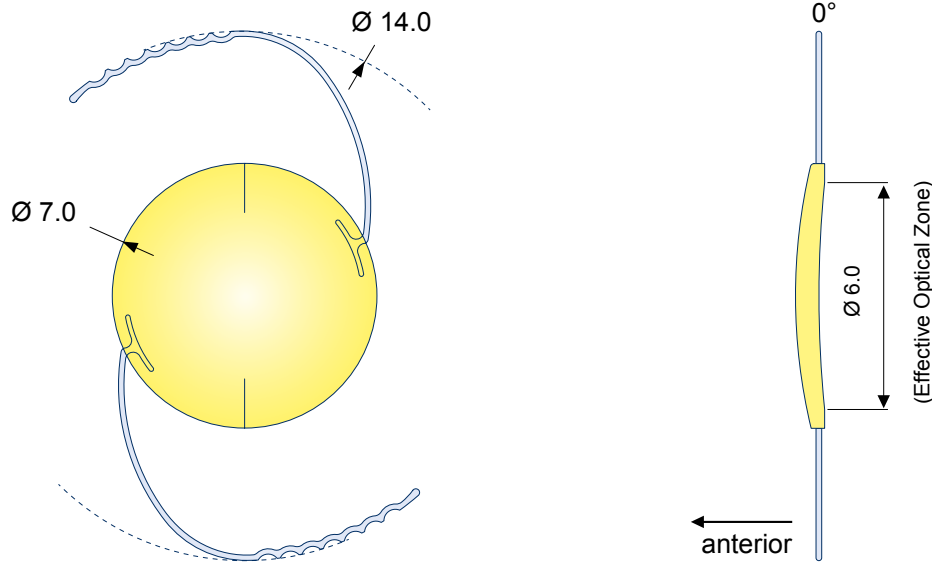

on a scale of 5:1

Technical Information

Type	Toric Posterior Chamber Add-On IOL with Blue Light Protection (Three-Piece, Foldable) for Sulcus Fixation in Pseudophakic Eyes
Optic Material	Silicone Elastomer with UV-Absorber and Yellow Colouring Agent
Haptic Material	High Molecular PMMA
Haptic Shape	Modified C-Loop (Undulated)
Optic Shape	Toric Anterior Surface, Spheric Posterior Concave Surface
Sphere Range	in 0.5 D steps: -6.0 to 3.0 D in 1.0 D steps: -30.0 to -7.0 D / 4.0 to 6.0 D
Cylinder Range	in 1.0 D steps: 1.0 D to 30.0 D
	Availability depending on combination of sphere and cylinder. More details on diopter categories see page 2
A-Constant (est.)	Not Applicable (by Application Principle)
Cylinder Axis	The Two Thin Diametrically Opposed Lines in the Periphery of the Optic Indicate the Axis of the Plus-Cylinder

HumanOptics AG

Spardorferstraße 150
91054 Erlangen


Phone: +49 (0) 9131 / 50665-0
Fax: +49 (0) 9131 / 50665-90

www.humanoptics.com
mail@humanoptics.com

05/2011

Diopter Category – Torica-sPBV

	Standard I	IOLs with spherical equivalent of 0.0 D
	Standard II	
	Special	
	Customized plus	

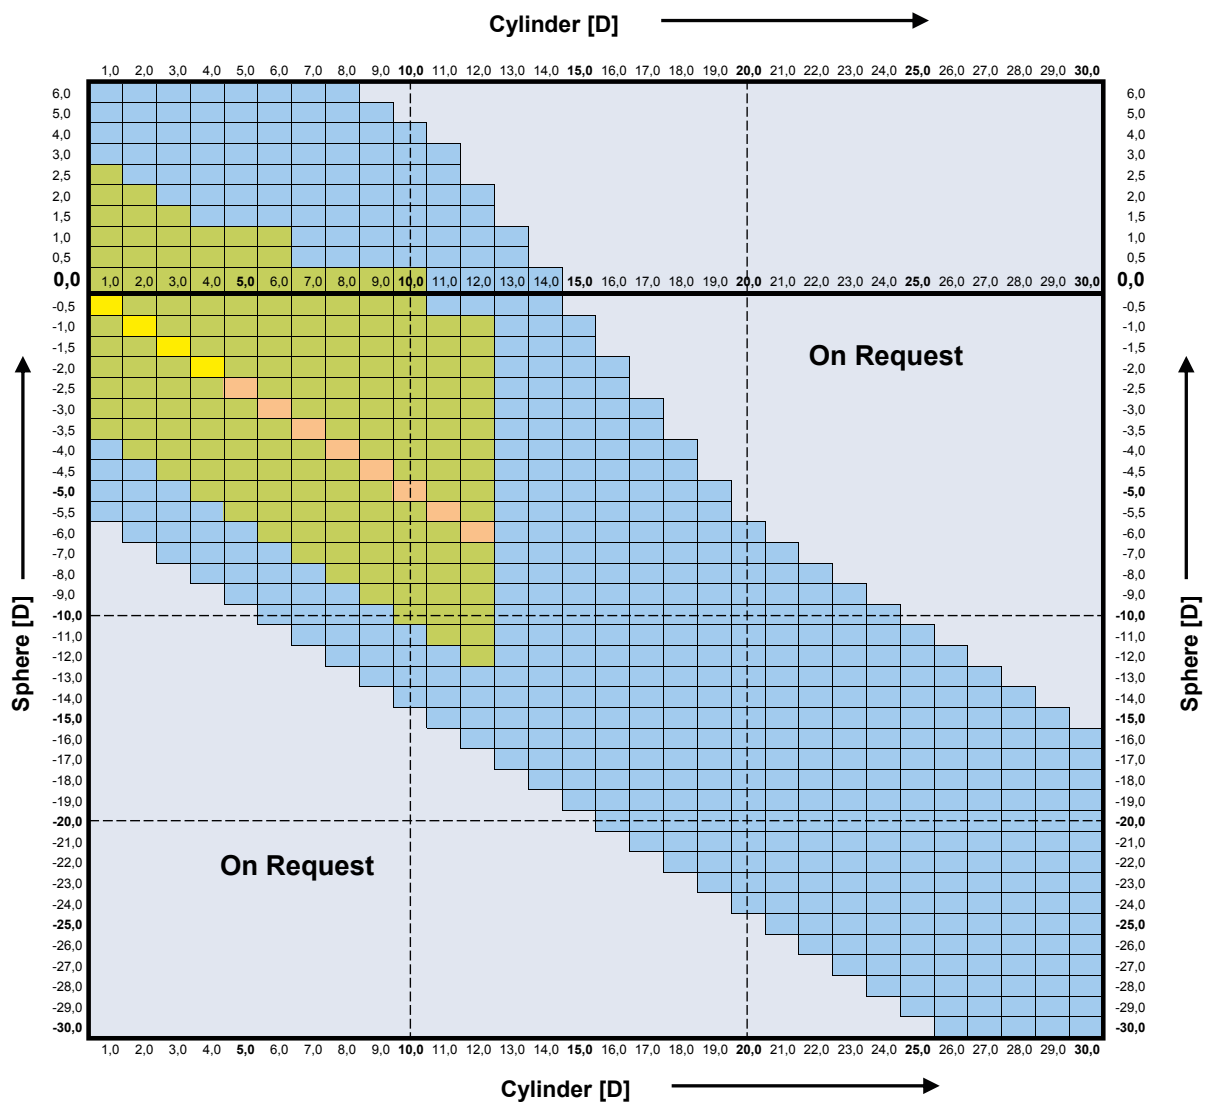

The diopter category does not indicate any conclusion related to availability. The delivery time of single powers might vary and is subject to change.