


ToricaDiff-sPB

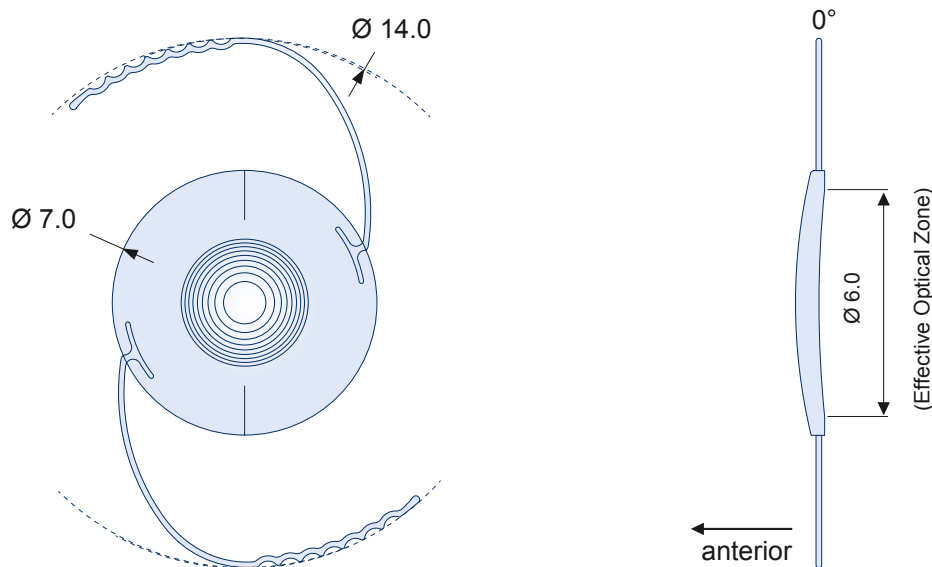

Technical Information

<b>Type</b>	Toric Multifocal Posterior Chamber Add-On IOL (Three-Piece, Foldable) for Sulcus Fixation in Pseudophakic Eyes
<b>Optic Material</b>	Silicone Elastomer with UV-Absorber
<b>Haptic Material</b>	High Molecular PMMA
<b>Haptic Shape</b>	Modified C-Loop (Undulated)
<b>Optic Shape</b>	Diffraction Anterior Surface, Toric Posterior Surface (≈ Aberration Free)* Convex-concave with Round Anterior Optic Edge to Prevent Iris Irritation
<b>Power</b>	in 0.5 D steps: -3.0 D to 3.0 D
<b>Cylinder Range</b>	in 0.5 D steps: 1.0 D to 4.0 D
	<b>Availability depending on combination of sphere and cylinder. More details on diopter categories see page 2</b>
<b>Near Addition</b>	+ 3.5 D (on IOL plane)
<b>A-Constant (est.)</b>	Not Applicable (by Application Principle)
<b>Cylinder Axis</b>	The Two Thin Diametrically Opposed Lines in the Periphery of the Optic Indicate the Axis of the Plus-Cylinder

HumanOptics AG

Spardorferstraße 150  
91054 Erlangen

Phone: +49 (0) 9131 / 50665-0  
Fax: +49 (0) 9131 / 50665-90


www.humanoptics.com  
mail@humanoptics.com

03/2011

\* The word „aberration“ as used in this document is interpreted as „spherical aberration“

# Dioptr Category – ToricaDiff-sPB

	<b>Standard</b>	IOLs with spherical equivalent of 0.0 D
	<b>Special</b>	
	<b>Customized</b>	

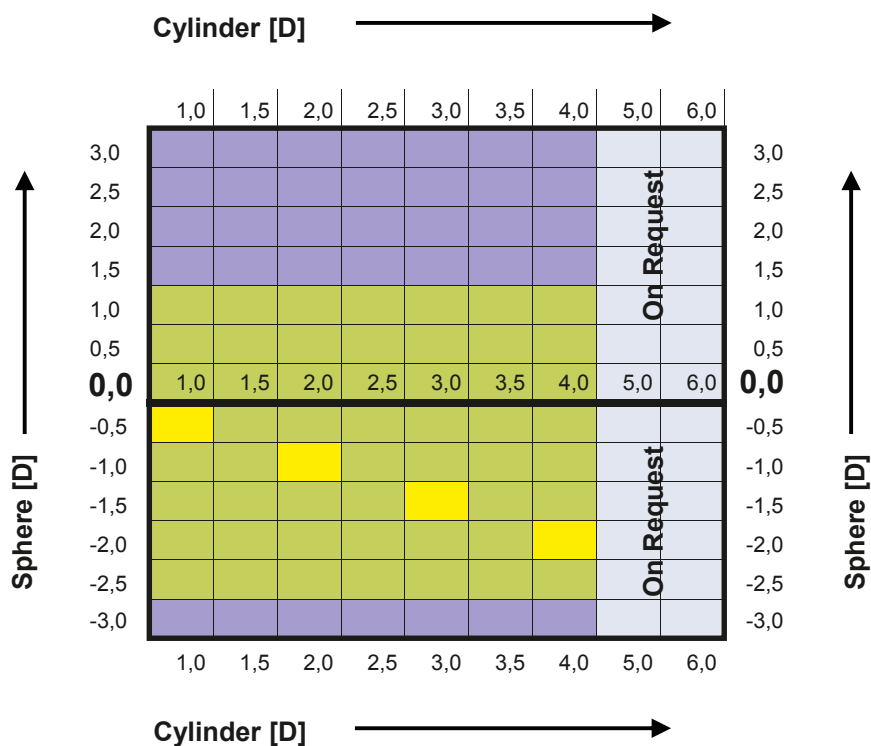

The dioptr category does not indicate any conclusion related to availability. The delivery time of single powers might vary and is subject to change.